

Fuzzy Logic Controlling of a Single Phase Seven-Level Grid-Connected Inverter for Photovoltaic system

Siva GanaVara Prasad. P¹, Amrutha Veena.Chandrapati², Navyata Yesodha Rao.K³, Lakshmi Prasanth.K⁴

^{1,3,4}Department of Electrical Electronics Engineering, St Ann's College of Engineering & Technology, Chirala,Prakasam (dt),A.P,India

²Department of Electrical Electronics Engineering, Bapatla engineering college, Bapatla, Guntur (dt),A.P,India

sivagana@gmail.com, amrutha.eee1@gmail.com, navyathakola59@gmail.com, naniprasanth00@gmail.com

Abstract— This paper proposes fuzzy logic controller based a single-phase seven-level inverter for grid-connected photovoltaic systems, with a novel pulse width-modulation (PWM) control scheme. Three reference signals produces from fuzzy logic controller which are identical to each other are going to compare with the amplitude of the triangular carrier signal. The inverter is capable of producing seven levels($V_{ab} = V_{dc}$ $V_{ab} = 2V_{dc}/3$ $V_{ab} = V_{dc}/3$ $V_{ab} = 0$ $V_{ab} = -V_{dc}/3$ $V_{ab} = -2V_{dc}/3$ $V_{ab} = -V_{dc}$)of output-voltage levels from the dc supply voltage. The total harmonic distortion is reduces by this control strategy. The proposed system was verified through simulation.

Keywords— Fuzzy logic Controller, Grid connected, modulation index, multilevel inverter, photovoltaic (PV) system, pulse width-modulated (PWM), total harmonic distortion (THD).

I. INTRODUCTION

Fuzzy controllers are uses for controlling consumer products, such as washing machines, video cameras, and rice cookers, as well as industrial processes, such as cement kilns, underground trains, and robots. Fuzzy control is a control method based on fuzzy logic. Just as fuzzy logic can be described simply as "computing with words rather than numbers"; fuzzy control can be described simply as "control with sentences rather than equations". A fuzzy controller can include empiric al rules, and that is especially useful in operator controlled plants [1]. The objective here is to identify and explain design choices for engineers.

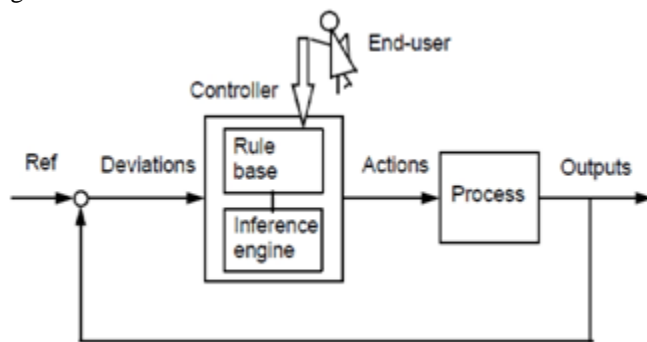


Fig 1. Fuzzy logic process

A single-phase grid-connected inverter is usually used for an engineering application which is controlled by a fuzzy system. Types of single-phase grid-connected inverters have been investigated [2]. A common topology of this inverter is full-bridge three-level. The three-level inverter can satisfy specifications through its very high switching, but it could also unfortunately increase switching losses, acoustic noise, and level of interference to other equipment. Improving its output waveform reduces its harmonic content and, hence, also the size of the filter used and the level of electromagnetic interference (EMI) generated by the inverter's switching operation [3]. The input for a seven level inverter is photo voltaic cells which reduces the pollution level due to generation [4].

II. FUZZY LOGIC CONTROLLERS

A. Introduction to fuzzy logic:

The logic of an approximate reasoning continues to grow in importance, as it provides an in expensive solution for controlling know complex systems. Fuzzy logic controllers are already used in appliances washing machine, refrigerator, vacuum cleaner etc. Computer subsystems (disk drive controller, power management) consumer electronics (video, camera, battery charger) C.D. Player etc. and so on in last decade, fuzzy controllers have convert adequate attention in motion control systems. As the later possess non-linear characteristics and a precise model is most often unknown. Remote controllers are increasingly being used to control a system from a distant place due to inaccessibility of the system or for comfort reasons. In this work a fuzzy remote controllers is developed for speed control of a converter fed dc motor. The performance of the fuzzy controller is compared with conventional P-I controller.

B. Unique features of fuzzy logic

The unique features of fuzzy logic that made it a particularly good choice for many control problems are as follows, It is inherently robust since it does not require precise, noise – free inputs and can be programme to fail safely is a feedback sensor quits or is destroye. The output control is a smooth control

function despite a wide range of input variations. Since the fuzzy logic controller processes user-defined rules governing the target control system, it can be modified and tweaked easily to improve or drastically alter system performance. New sensors can easily be incorporated into the system simply by generating appropriate governing rules.

C. Fuzzification and Normalization

Fuzzification is related to the vagueness and imprecision in a natural language. It is a subjective valuation, which transforms a measurement into a valuation of an objective input space to fuzzy sets in certain input universes of discourse. In fuzzy control applications, the observed data are usually crisp. Since the data manipulation in a fuzzy logic controller is based on fuzzy set theory, fuzzification is necessary in an earlier stage.

D. Membership functions

Fuzzy system uses '4' different shapes of MF's., those are Triangular, Gaussian, Trapezoidal, sigmoid, etc.,

i. Triangular membership function

The simplest and most commonly used membership functions are triangular membership functions, which are symmetrical and asymmetrical in shape. Trapezoidal membership functions are also symmetrical or asymmetrical and have the shape of a truncated triangle.

ii. Gaussian membership function

Two membership functions, Triangular and Trapezoidal, are built on the Gaussian curve and two-sided composite of two different Gaussian curves.

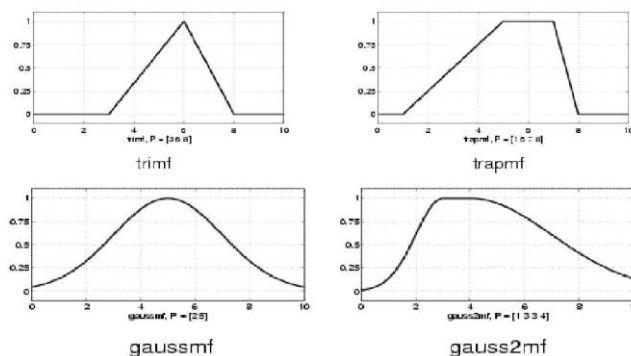


Fig 2. Membership functions

E. Fuzzy system

The fuzzy interface system (Fuzzy system) basically consists of a formulation of the mapping from a given input set to an output set using Fuzzy logic. The mapping process provides the basis from which the inference or conclusion can be made.

F. Steps for A Fuzzy interface process

- Fuzzification of input variables.
- Application of Fuzzy operator (AND, OR, NOT) in the IF (antecedent) part of the rule.
- Implication from the antecedent to the consequent (Then part of the rule).

- Aggregation of the consequents across the rules.
- Defuzzification.

Generally there will be a matrix of rules similar to the ES rule matrix. For example: There are 7 MF for input variables 'x' and MF for input variable 'y' then there will be all together 35 rules.

G. Implication method

The implication step (3) introduces to evaluate the individual rules.

Methods:

- 1) MAMDANI
- 2) SUGENO
- 3) LUSING LARSON.
 - i. Mamdani

Mamdani, one of the pioneers in the application of 'FL' in control systems, proposes this implication method. This Mamdani method is most commonly used method. The outputs of the Mamdani method are truncated signals of the inputs; this output is depending on the minimum values in the inputs.

Ex: If X is zero (ZE) AND y is positive (PS) Then Z is negative.

ii. Sugeno

The Sugeno or Takagi-Sugeno-Kang method of implication was first introduced in 1985. The difference here is that unlike the Mamdani and Lusing Larson methods, the output MFs are only constants or have linear relations with the inputs with a constant output MF (Singleton), it is defined as the Zero-order Sugeno method; whereas with a linear relation, it is known as first order Sugeno method. The outputs of the Sugeno method have a constant minimum value in the input.

H. Defuzzification and Denormalization

The function of a defuzzification module (DM) is as follows: Performs the so-called defuzzification, which converts the set of modified control output values into single point-wise values.

Performs an output denormalization, which maps the point-wise value of the control output onto its physical domain. This step is not needed if non-normalized fuzzy sets are used.

A defuzzification strategy is aimed at producing a non-fuzzy control action that best represents the possibility of an inferred fuzzy control action. Seven strategies in the literature, among the many that have been proposed by investigators, are popular for defuzzifying fuzzy output functions:

- Max-membership principle
- Centroid method
- Weighted average method
- Mean-max membership
- Centre of sums.
- Centre of largest area
- First (or last) of maxima.

The best well-known defuzzification method is Centroid method.

Centroid method:

The Centroid method also refers as center-of-area or center – of – gravity is the most popular defuzzification method.

In the discrete case $U=\{u_1, \dots, u_l\}$ this results in

$$u^* = \frac{\sum_{i=1}^l \mu_i(U_i)}{\sum_{i=1}^l \mu_i(U_i)} \quad (1)$$

In the continuous case we obtain

$$u^* = \frac{\int_U u \mu_o(u) du}{\int_U \mu_o(u) du}$$

Where \int determines the center off area below the combined membership function domain.

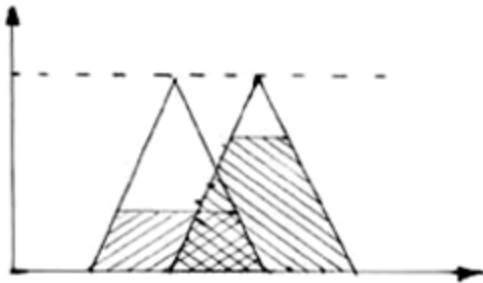


Fig 3. Center of – area, method of defuzzification

The above operation in a graphical way, it can be seen that this defuzzification method takes into account the area of U as whole. Thus if the area of two clipped fuzzy sets constituting ‘U’ overlap, then the over lapping are isnot reflected in the above formula. This operation is computationally rather complex and therefore results in quite slow inference cycles. Denormalization is the process to convert per unit quantities into actual quantities.

Design of rules for different membership functions:

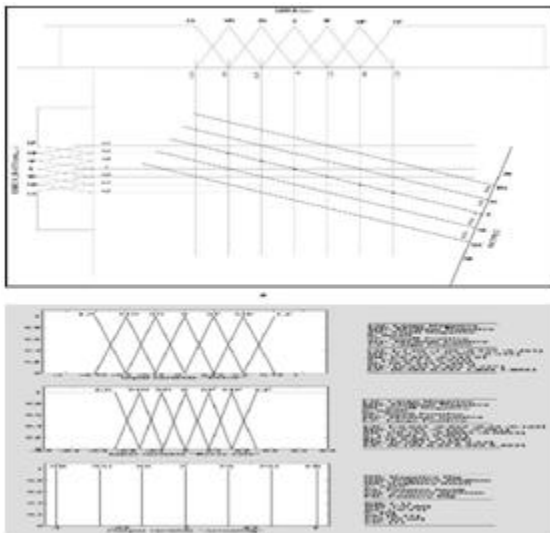


Fig 4. Membership figures for input and output

Membership shapes of I/O fuzzy sets and assignment of the control rules in the error phase plane.

i. Membership functions for inputs and output

1. Editing of fuzzy interface system

In this we edit the rules, ranges of each membership functions for inputs and outputs. The step by step procedure:

Step 1:- Edit the membership functions.

Input 1:- trimf, number 5, range

Input 2:- trimf, number 5, range

OUTPUT:-trimf, number 5, range

Step 2:- edit rules.

Step (a): first take the relating rules.

Step (b): add the rules respectively by selecting each Variable.

Step 3:- Export the FIS editor to the workspace

Step 4:- Link this FIS editor to the FIS rule viewer.

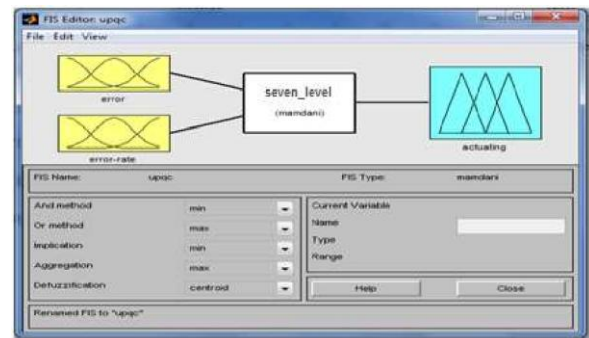


Fig.5. Fuzzy interface system

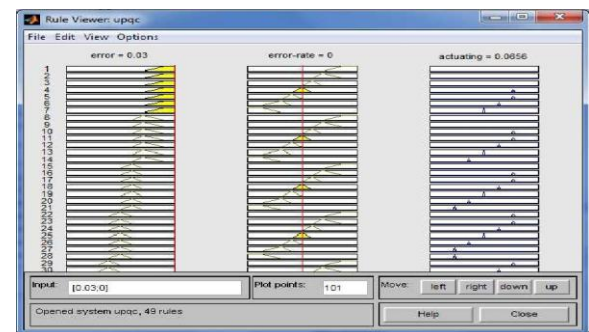


Fig.6. Fuzzy Rule Viewer

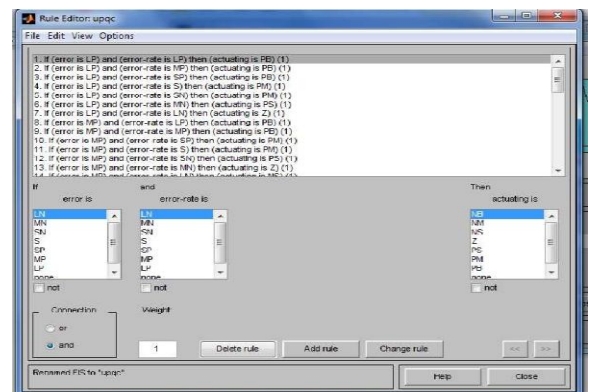


Fig 7. Fuzzy Rule Editor

III. PROPOSED MULTILEVEL INVERTER TOPOLOGY

The proposed single-phase seven-level inverter was developed From the five-level inverter in [15]–[18]. It comprises a single-phase conventional H-bridge inverter, two bidirectional Switches, and a capacitor voltage divider formed by C_1 , C_2 , And C_3 , as shown in Fig. 1. The modified H-bridge topology is

significantly advantageous over other topologies, i.e., less Power switch, power diodes, and less capacitor for inverters Of the same number of levels.

Photovoltaic (PV) arrays were connected to the inverter via a Dc–dc boost converter. The power generated by the inverter is to be delivered to the power network, so the utility grid, rather than a load, was used. The dc–dc boost converter was required because the PV arrays had a voltage that was lower than the grid voltage. High dc bus voltages are necessary to ensure that power flows from the PV arrays to the grid. A filtering inductance L_f was used to filter the current injected into the grid. Proper switching of the inverter can produce seven output-voltage levels (V_{dc} , $2V_{dc}/3$, $V_{dc}/3$, 0 , $-V_{dc}$, $-2V_{dc}/3$, $-V_{dc}/3$) from the dc supply voltage.

The proposed inverter's operation can be divided into seven switching states, as shown in Fig. 8(a)–(g). Fig. 8(a), (d), and (g) shows a conventional inverter's operational states in sequence, while Fig. 8(b), (c), (e), and (f) shows additional states in the proposed inverter synthesizing one- and two-third levels of the dc-bus voltage.

The required seven levels of output voltage were generated as follows.

1) Maximum positive output (V_{dc}): S_1 is ON, connecting the load positive terminal to V_{dc} , and S_4 is ON, connecting the load negative terminal to ground. All other controlled switches are OFF; the voltage applied to the load terminals is V_{dc} . Fig. 1.12. Shows the current paths that are active at this stage.

2) Two-third positive output ($2V_{dc}/3$): The bidirectional switch S_5 is ON, connecting the load positive terminal, and S_4 is ON, connecting the load negative terminal to ground. All other controlled switches are OFF; the voltage applied to the load terminals is $2V_{dc}/3$. Fig. 8(b) shows the current paths that are active at this stage.

3) One-third positive output ($V_{dc}/3$): The bidirectional switch S_6 is ON, connecting the load positive terminal, and S_4 is ON, connecting the load negative terminal to ground. All other controlled switches are OFF; the voltage applied to the load terminals is $V_{dc}/3$. Fig. 8(c) shows the current paths that are active at this stage.


4) Zero output: This level can be produced by two switching combinations; switches S_3 and S_4 are ON, or S_1 and S_2 are ON, and all other controlled switches are OFF; terminal ab is a short circuit, and the voltage applied to the load terminals is zero. Fig. 8(d) shows the current paths that are active at this stage.

5) One-third negative output ($-V_{dc}/3$): The bidirectional switch S_5 is ON, connecting the load positive terminal, and S_2 is ON, connecting the load negative terminal to V_{dc} . All other

controlled switches are OFF; the voltage Applied to the load terminals is $-V_{dc}/3$. Fig. 8(e) shows the current paths that are active at this stage.

6) Two-third negative output ($-2V_{dc}/3$): The bidirectional switch S_6 is ON, connecting the load positive terminal, and S_2 is ON, connecting the load negative terminal to ground. All other controlled switches are OFF; the voltage applied to the load terminals is $-2V_{dc}/3$. Fig. 8(f) shows the current paths that are active at this stage.

7) Maximum negative output ($-V_{dc}$): S_2 is ON, connecting the load negative terminal to V_{dc} , and S_3 is ON, connecting the load positive terminal to ground. All other controlled switches are OFF; the voltage applied to the load terminals is $-V_{dc}$. Fig. 8(g) shows the current paths that are active at this stage.

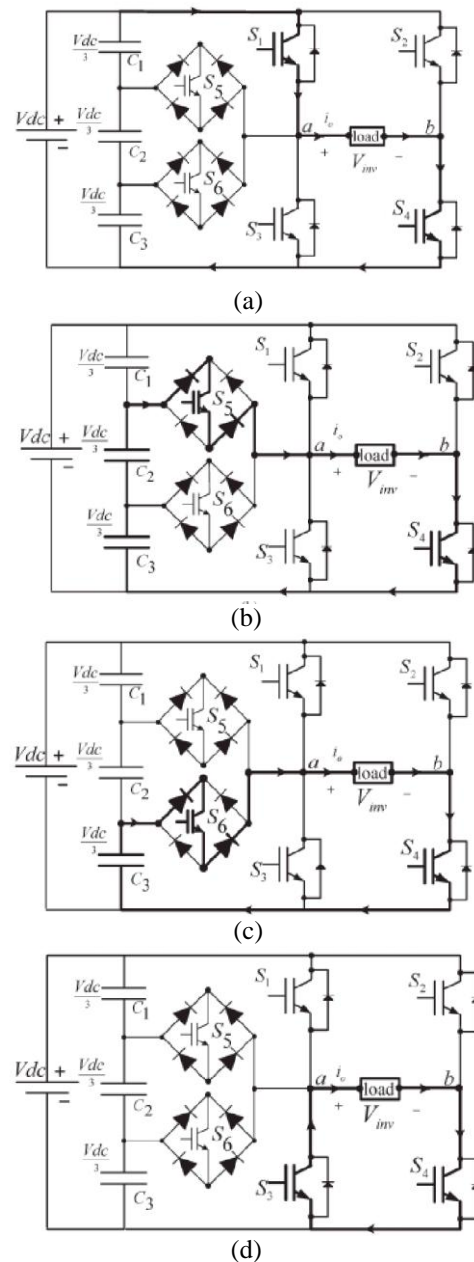

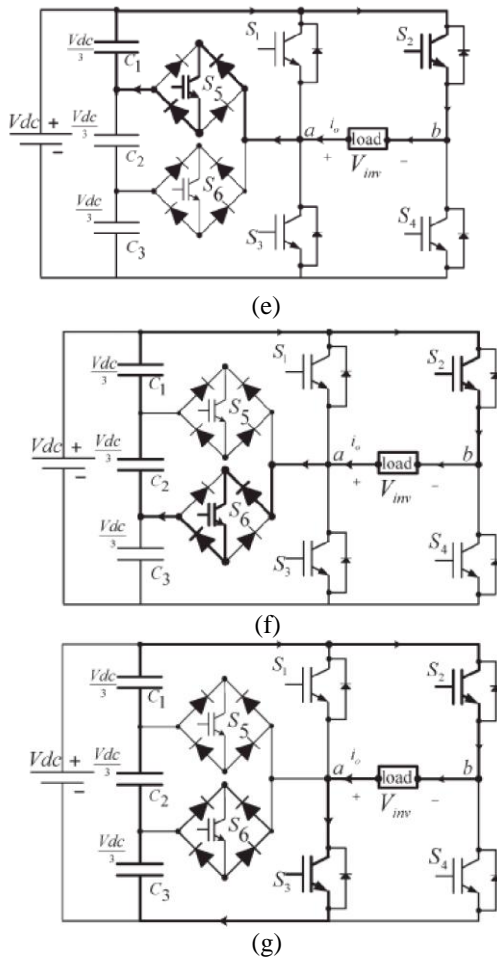


Fig. 8. Switching combination required to generate the output voltage (V_{ab}).

(a) $V_{ab} = V_{dc}$. (b) $V_{ab} = 2V_{dc}/3$. (c) $V_{ab} = V_{dc}/3$. (d) $V_{ab} = 0$.
(e) $V_{ab} = -V_{dc}/3$. (f) $V_{ab} = -2V_{dc}/3$. (g) $V_{ab} = -V_{dc}$.

IV. SIMULATON RESULTS

MATLAB SIMULINK simulates the inverter operates at a high switching rate that was equivalent to the frequency of the carrier signal, while the other leg operates at the rate of the fundamental frequency (i.e., 50 Hz). Switches S_5 and S_6 also operates at the rate of the carrier signal. Fig. 12 shows the simulation result of inverter output voltage V_{inv} . The dc-bus voltage was set at 300 V ($>\sqrt{2}V_{grid}$; in this case, V_{grid} was 120 V). The dc-bus voltage must always be higher than $\sqrt{2}$ of V_{grid} to inject current into the grid, or current injects from the grid into the inverter. Therefore, operation is recommend between $M_a = 0.66$ and $M_a = 1.0$. V_{inv} comprises seven voltage levels, namely, V_{dc} , $2V_{dc}/3$, $V_{dc}/3$, 0 , $-V_{dc}$, $-2V_{dc}/3$, and $-V_{dc}/3$. The current flowing into the grid was filters to resemble a pure sine wave in phase with the grid voltage

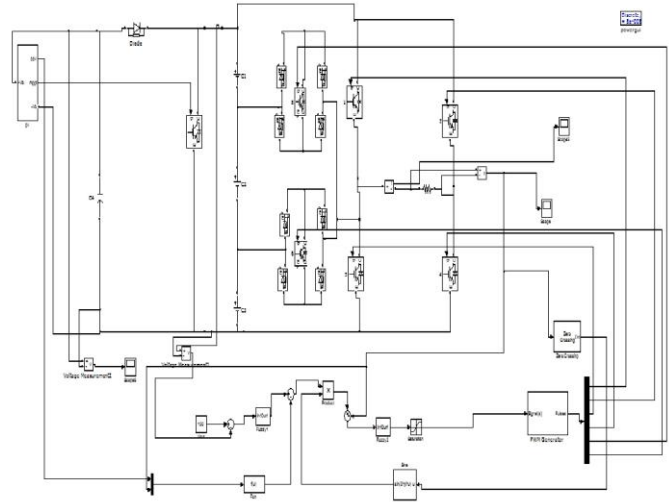


Fig 9. 7 level fuzzy

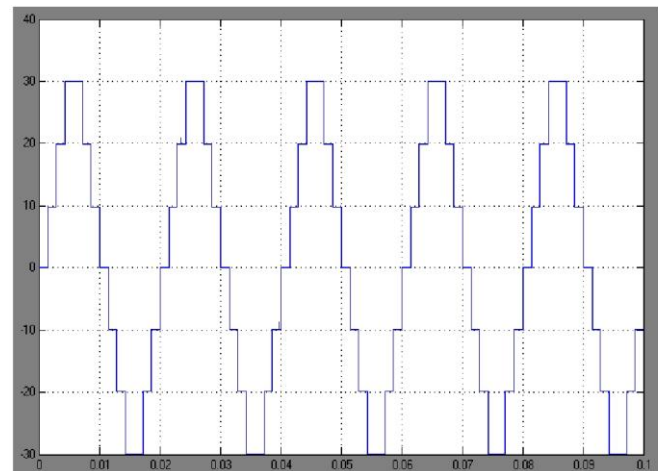


Fig 10: Current waveform with fuzzy

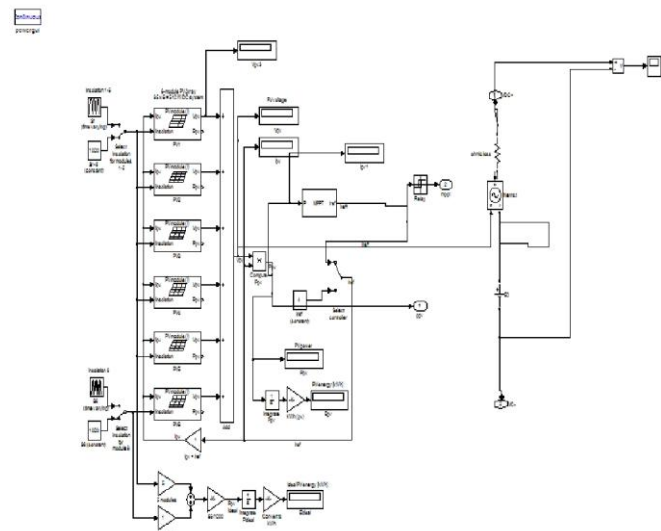


Fig 11. PV system

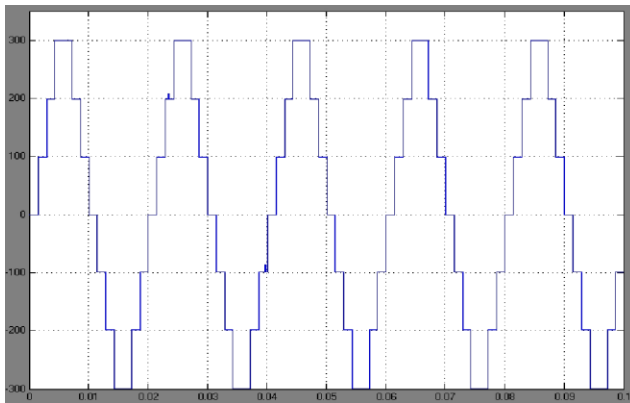


Fig 12. Voltage waveform with fuzzy

V. CONCLUSION

Fuzzy logic controller to multilevel inverters improves output waveforms and lower THD. This paper has presented a novel FUZZY PWM switching scheme for the proposed multilevel inverter. It utilizes three reference signals and a triangular carrier signal to generate PWM switching signals. The three reference signals are obtained by fuzzy controller. The behavior of the proposed fuzzy logic controller multilevel inverter was analyzed in detail. By controlling the modulation index, the desired number of levels of the inverter's output voltage can be achieved. The less THD in the fuzzy seven-level inverter compared with that in the IEEE standard seven-level inverters using conventional controllers.

REFERENCES

The template will number citations consecutively within brackets [1]. The sentence punctuation follows the bracket [2]. Refer simply to the reference number, as in [3]—do not use “Ref. [3]” or “reference [3]” except at the beginning of a sentence: “Reference [3] was the first ...”

Number footnotes separately in superscripts. Place the actual footnote at the bottom of the column in which it was cited. Do not put footnotes in the reference list. Use letters for table footnotes.

Unless there are six authors or more give all authors' names; do not use “et al.”. Papers that have not been published, even if they have been submitted for publication, should be cited as “unpublished” [4]. Papers that have been accepted for publication should be cited as “in press” [5]. Capitalize only the first word in a paper title, except for proper nouns and element symbols.

For papers published in translation journals, please give the English citation first, followed by the original foreign-language citation [6].

- i. Mizumoto, M. (1992). Realization of PID controls by fuzzy control methods, *LQ IEEE (ed.)*, LUVW ,QW &RQI 2Q)XJJ\ 6\ VWHPV, number 92CH3073-4, The Institute of Electrical and Electronics Engineers, Inc, San Diego, pp. 709–715.
- ii. S. B. Kjaer, J. K. Pedersen, and F. Blaabjerg, “A review of single-phase grid connected inverters for photovoltaic modules,” *IEEE Trans. Ind. Appl.*, vol. 41, no. 5, pp. 1292–1306, Sep./Oct. 2005.
- iii. P. K. Hinga, T. Ohnishi, and T. Suzuki, “A new PWM inverter for photovoltaic power generation system,” in *Conf. Rec. IEEE Power Electron. Spec. Conf.*, 1994, pp. 391–395.
- iv. Y. Cheng, C. Qian, M. L. Crow, S. Pekarek, and S. Atcitty, “A comparison of diode-clamped and cascaded multilevel converters for a STATCOM with energy storage,” *IEEE Trans. Ind. Electron.*, vol. 53, no. 5, pp. 1512–1521, Oct. 2006.
- v. M. Saeedifard, R. Iravani, and J. Pou, “A space vector modulation strategy for a back-to-back five-level HVDC converter system,” *IEEE Trans. Ind. Electron.*, vol. 56, no. 2, pp. 452–466, Feb. 2009.
- vi. S. Alepuz, S. Busquets-Monge, J. Bordonau, J. A. M. Velasco, C. A. Silva, J. Pontt, and J. Rodriguez, “Control strategies based on symmetrical components for grid-connected converters under voltage dips,” *IEEE Trans. Ind. Electron.*, vol. 56, no. 6, pp. 2162–2173, Jun. 2009.
- vii. J. Rodriguez, J. S. Lai, and F. Z. Peng, “Multilevel inverters: A survey of topologies, controls, and applications,” *IEEE Trans. Ind. Electron.*, vol. 49, no. 4, pp. 724–738, Aug. 2002.
- viii. J. Rodriguez, S. Bernet, B. Wu, J. O. Pontt, and S. Kouro, “Multilevel voltage-source-converter topologies for industrial medium-voltage drives,” *IEEE Trans. Ind. Electron.*, vol. 54, no. 6, pp. 2930–2945, Dec. 2007.
- ix. M. M. Renge and H. M. Suryawanshi, “Five-level diode clamped inverter to eliminate common mode voltage and reduce dv/dt in medium voltage rating induction motor drives,” *IEEE Trans. Power Electron.*, vol. 23, no. 4, pp. 1598–1160, Jul. 2008.
- x. E. Ozdemir, S. Ozdemir, and L. M. Tolbert, “Fundamental-frequency modulated six-level diode-clamped multilevel inverter for three-phase stand-alone photovoltaic system,” *IEEE Trans. Ind. Electron.*, vol. 56, no. 11, pp. 4407–4415, Nov. 2009.
- xi. R. Stala, S. Pirog, M. Baszynski, A. Mondzik, A. Penczek, J. Czekanski, and S. Gasiorek, “Results of investigation of multi cell converters with balancing circuit—Part I,” *IEEE Trans. Ind. Electron.*, vol. 56, no. 7, pp. 2610–2619, Jul. 2009.
- xii. R. Stala, S. Pirog, M. Baszynski, A. Mondzik, A. Penczek, J. Czekanski, and S. Gasiorek, “Results of investigation of multi cell converters with balancing circuit—Part II,” *IEEE Trans. Ind. Electron.*, vol. 56, no. 7, pp. 2620–2628, Jul. 2009.
- xiii. P. Lezana, R. Aguilera, and D. E. Quevedo, “Model predictive control of an asymmetric flying capacitor converter,” *IEEE Trans. Ind. Electron.*, vol. 56, no. 6, pp. 1839–1846, Jun. 2009.
- xiv. Nasrudin A. Rahim, Senior Member, IEEE, Krismadinata Chaniago, Student Member, IEEE, and Jeyraj Selvaraj “single phase level grid-connected inverter for photovoltaic system” *IEEE Transactions On Industrial Electronics*, Vol. 58, No. 6, June 2011.
- xv. G. Ceglia, V. Guzman, C. Sanchez, F. Ibanez, J. Walter, and M. I. Gimenez, “A new simplified multilevel inverter topology for DC-AC conversion,” *IEEE Trans. Power Electron.*, vol. 21, no. 5, pp. 1311–1319, Sep. 2006.
- xvi. V. G. Agelidis, D. M. Baker, W. B. Lawrance, and C. V. Nayar, “A multilevel PWM inverter topology for photovoltaic applications,” in *Proc. IEEE ISIE*, Guimarães, Portugal, 1997, pp. 589–594.
- xvii. S. J. Park, F. S. Kang, M. H. Lee, and C. U. Kim, “An ew single-phase fivelevel PWM inverter employing a deadbeat control scheme,” *IEEE Trans. Power Electron.*, vol. 18, no. 3, pp. 831–843, May 2003.
- xix. J. Selvaraj and N. A. Rahim, “Multilevel inverter for grid-connected PV system employing digital PI controller,” *IEEE Trans. Ind. Electron.*, vol. 56, no. 1, pp. 149–158, Jan. 2009.
- xx. N. A. Rahim and J. Selvaraj, “Multi-string five-level inverter with novel PWM control scheme for PV application,” *IEEE Trans. Ind. Electron.*, vol. 57, no. 6, pp. 2111–2121, Jun. 2010.